

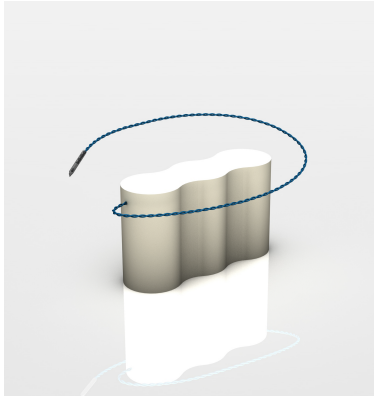

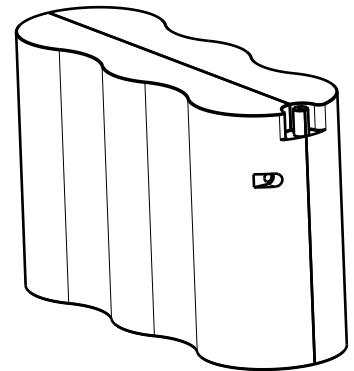


GMP RF F 6R3V



Real Time Wireless Temperature Data Logger with Flexible Sensor -50°C to +85°C

- + Collects and transmits real time temperature to XpertLog Software
- + ITS-90 calibration coefficients are stored in the internal memory
- + Complies with FDA 21 CFR Part 11
- + Network ready: multiple users, centralized, server database, active directory authentication
- + Calibration can be performed on site
- + Can be remotely activated



Sensor type	4 wires thin, teflon
- flexible	200 mm (7.87") or custom length
- customized	up to 5000 mm (195")
- Sensor size	1.2 x 1.6 mm (0.05 x 0.06")
- cross section	0.48 mm ² (0.0007 inch ²)
Operating Range	
- body	-50°C to +85°C
- Sensor	-90°C to +140°C
Accuracy	±0.1°C from -50°C to +85°C
Resolution	0.01°C
Memory capacity	32,000 data points
Memory type	non volatile
Sampling rate	1 sec to 24 hours
Transmission	simultaneous: maximum 20 loggers
	sequential: unlimited
Internal clock drift	4 sec / 24 h @ 23°C
Mechanical	
- material	Peek 1000 - FDA compliant
	Screws: 316L
- enclosure	IP-68
- weight	54 g (1.91 oz)
- length	72 mm (2.84")
- width	18 mm (0.70")
- height	33 (1.3")
Power	2 x Lithium batteries user replaceable
Battery lifetime	Up to 4 months, based on usage
Antenna	Internal
Wireless range	121 m (400 feet)
Radio frequency	2.4 Ghz ISM band
Access point	USB to computer
Calibrations	Programs and reads unlimited number of loggers Factory Calibrations: traceable NIST/COFRAC - ITS-90 coefficients stored in the internal memory User Calibrations: closed loop calibration using XpertLog® software
Certification	Health Safety: EN 60950-1 / 2006 EN 60601-1-2 / 2007 EN 300440-2 v1.3.1 (2009-03)

Order Reference
GMP-RF-F-6R3V

Standard Calibration Points

- -50°C
- 0°C
- 85°C

LVSC International®

